



- NOTE:
1. MINIMUM ENCLOSURE DIMENSIONS FOR FOUR CUBIC YARD FRONT LOAD SOLID WASTE BINS.
 2. ALL DIMENSIONS ARE INSIDE DIMENSIONS TO INSIDE FACE OF WALL OR INSIDE OF POSTS WHICH EVER IS SMALLER.
 3. PROVIDE GATE STOP ON ALL GATES IN OPEN POSITION.
 4. NO GREASE TO BE PLACED IN BINS. PROVIDE SEPARATE CONTAINERS.
 5. CONSTRUCT POSTS OR RAIL OR CURB ACROSS THE BACK OF THE ENCLOSURE A MINIMUM OF 12" OR AS NECESSARY FROM BACK WALL OR FENCE TO PROVIDE INDICATED CLEARANCE.
 6. ALL CONCRETE FLOORS AND CONCRETE PADS SHALL BE 8 INCHES THICK UNLESS OTHERWISE APPROVED BY THE SOLID WASTE DIVISION.

SINGLE BIN ENCLOSURE

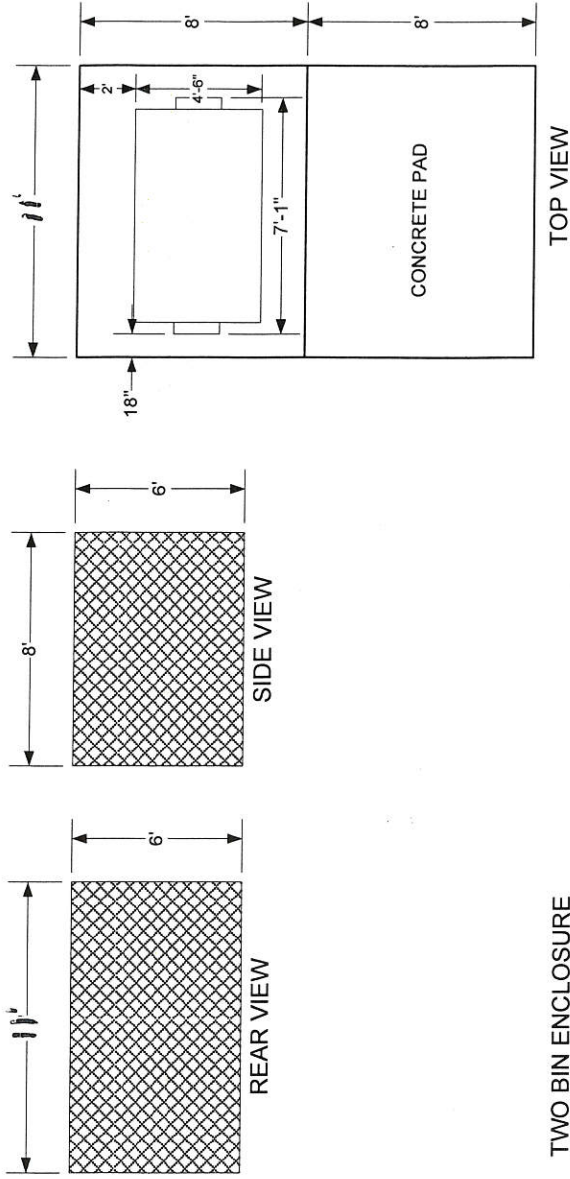

TWO BIN ENCLOSURE

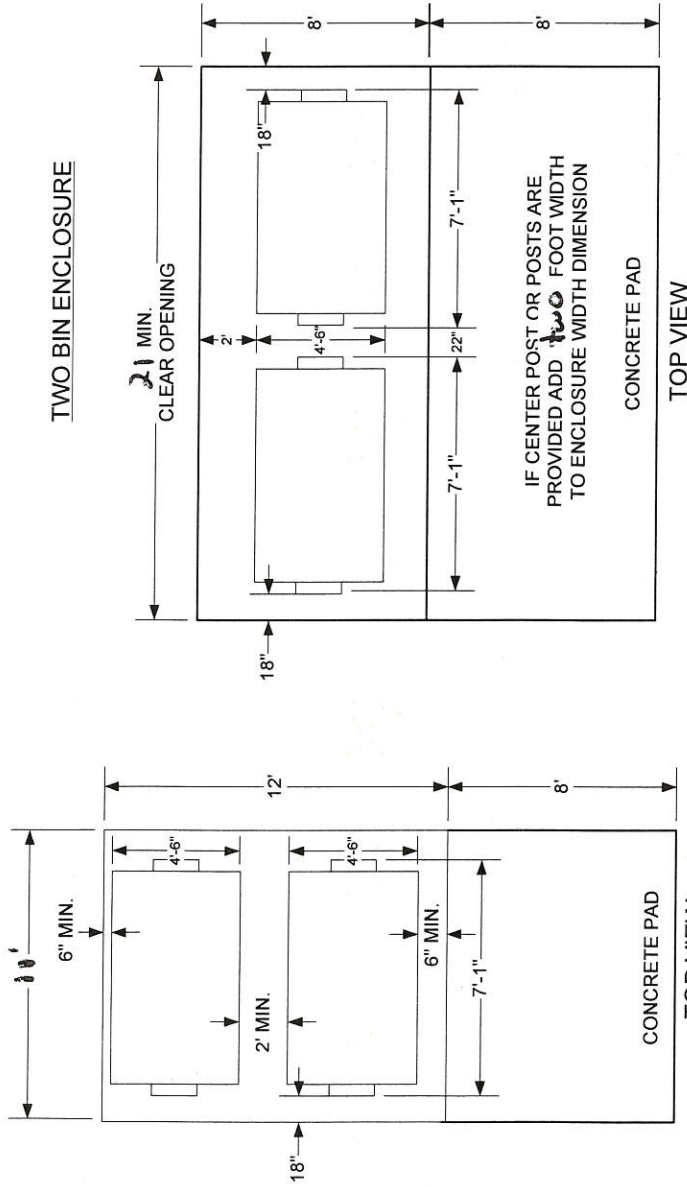


TOP VIEW
ONE IN FRONT OF OTHER



Solid Waste Division – Front Load Enclosures

NOT TO SCALE

REVISED 9/18/2009

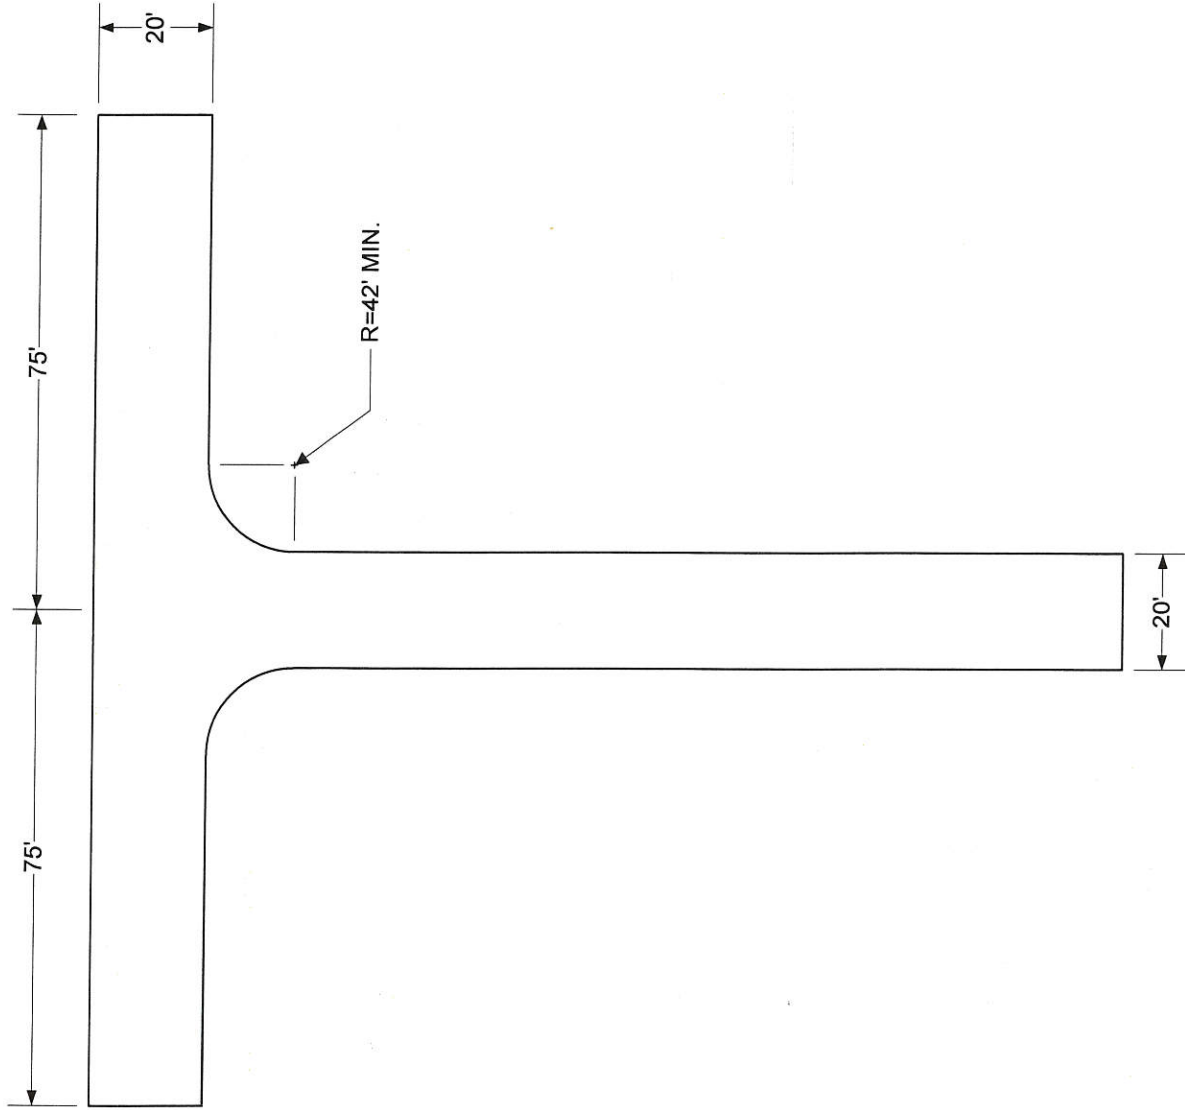


Solid Waste Division – Alternative Turnaround
For Dead Ends in Excess of 150'



NOT TO SCALE

REVISED 9/18/2009

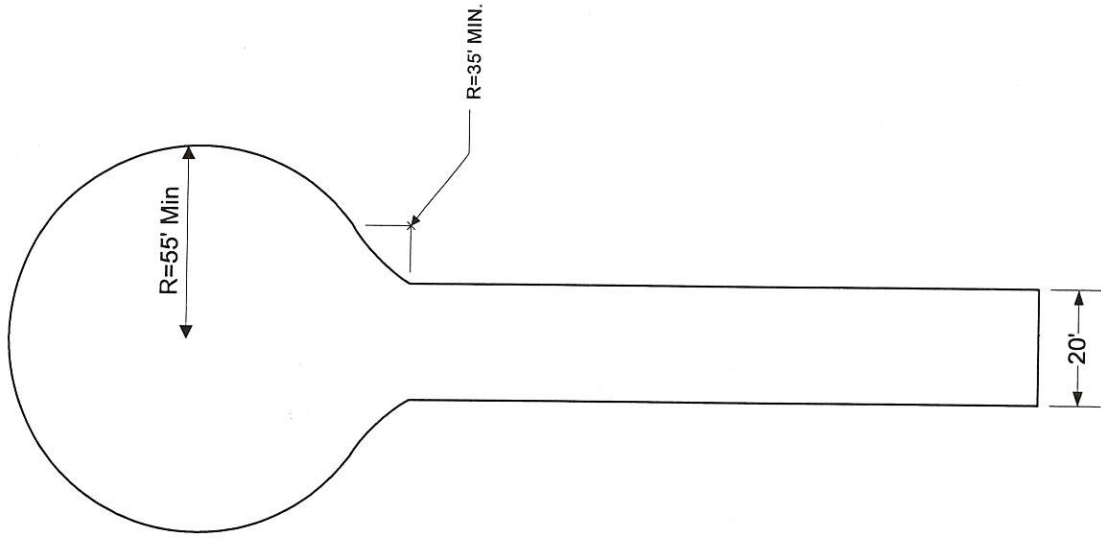

Solid Waste Division – Minimum Turnaround Radius For Cul-de-sac

NOT TO SCALE

REVISED 9/18/2009