Sheridan WYOMING

Building Department

TYPICAL FOOTING / FOUNDATION and BASEMENT WALL DETAIL

Revised 6/16

Typical Footing and Foundation Wall Detail

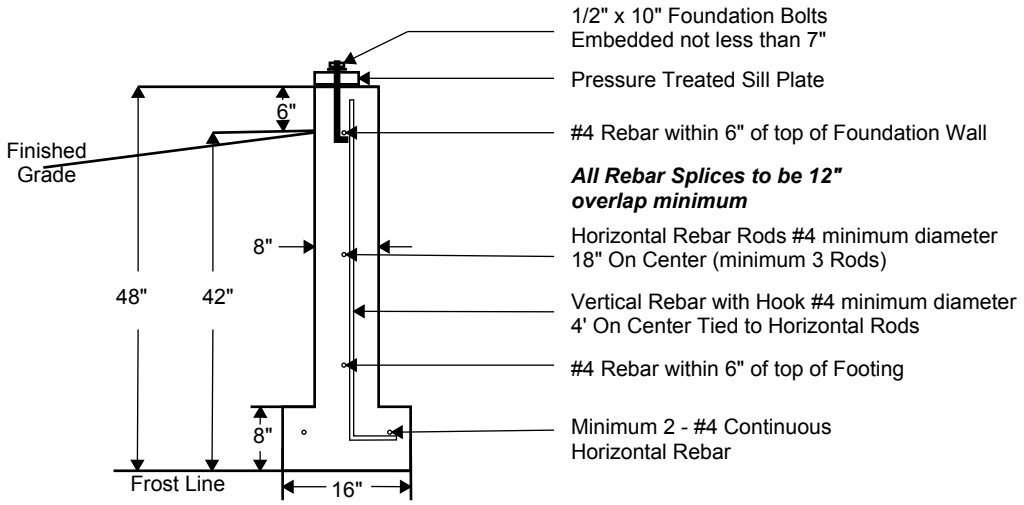

Foundation Bolts shall be spaced 6' apart Maximum and located within 12" of ends of Sill Plates (minimum 2 Bolts per Plate)
ANCHOR BOLTS TO BE LOCATED IN THE MIDDLE THIRD of PLATE

Rebar shall have a Minimum Concrete Cover of 1 1/2" Above Grade and a Minimum of 3" Below Grade

Typical Basement Wall Detail

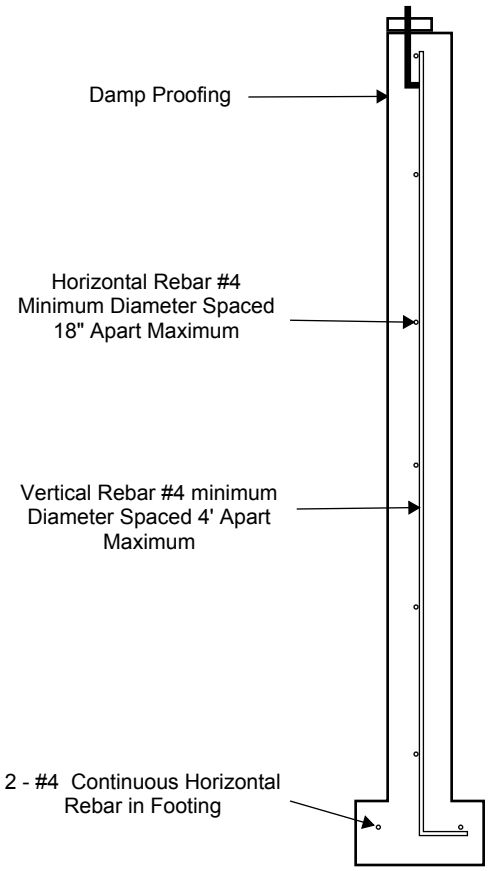

Concrete Wall

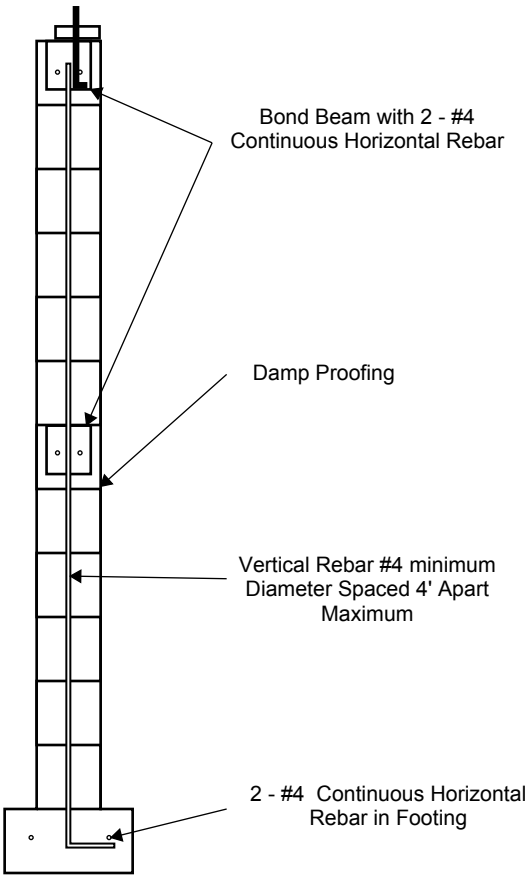

Block Wall